


### Key Features

- ❑ 11th-gen Intel® CPU ensures robust and efficient performance;
- ❑ Integrated structural design for seamless usability, offering a fast and convenient user experience;
- ❑ Large paper roll capability minimizes paper exchange frequency;
- ❑ Built-in industrial-grade PC featuring a 15-inch high-definition LCD screen; High-sensitivity capacitive touchscreen;
- ❑ Advanced weighing module enhances accuracy and prevents loss effectively.

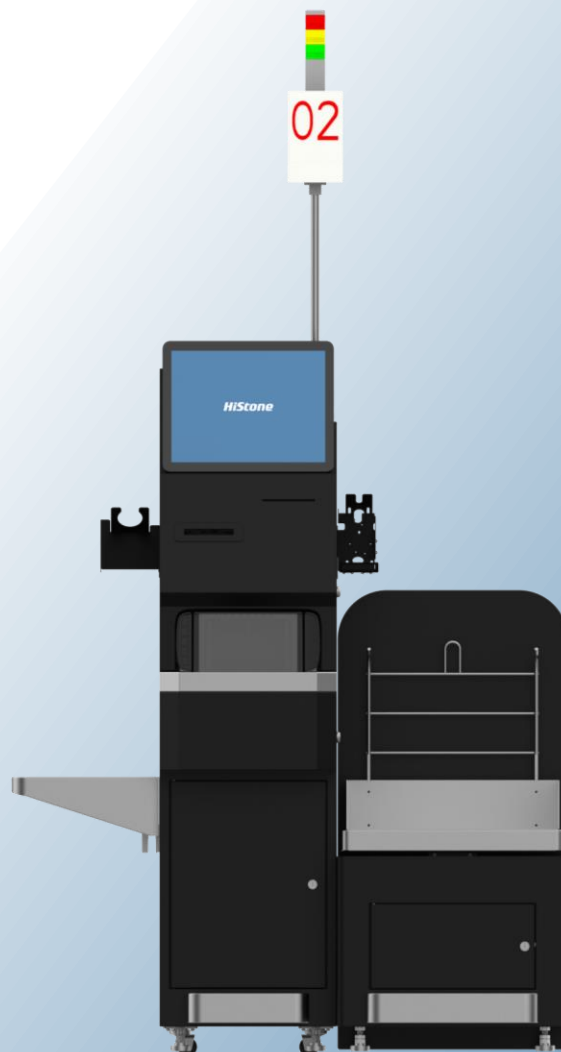

MODEL		HS610U	
Processor		Intel Tiger Lake UP3, Intel 11 <sup>th</sup> Gen CPU : Core i3 11gen Optional : Core i5 11gen	
Operating System		Windows 10/Windows 11/Linux	
Memory		SO-DIMM DDR4 3200MHz 4GB, up to 16GB	
Storage		2.5inch SATA SSD 128GB, up to 512GB	
		M.2 SSD 128GB, up to 512GB	
Display Panel		15”TFT LCD Display / 4:3 / Resolution : 1024*768	
Touch Screen		True flat capacitive touch screen	
Power Supply		120W integrated power supply	
Integrated Scanner		Short type scanner, Support 1D/2D Barcodes(standard)	
		Middle type scanner, support scales function(optional)	
Integrated Printer		80mm thermal printer	
Speaker		2*3W Speaker	
Wireless connection		Dual-band Wi-Fi® 802.11a/b/g/n/ac 2.4GHz/5GHz	Optional
		BT5.0	
I/O Ports		9*USB port	
		6*Serial port	
		1* RJ45 100M/1000M Gigabit LAN port	
		1* HDMI Port	
		1* 3.5mm audio Port	
		1* MIC-IN	
		1* 12V DC-IN	
		1*12V DC-OUT	
Dimensions (LxWxH)		800*700*1680mm	
Weight		62kg (Host + Base cabinet) ;36kg (60kg Scale)	
Optional Peripherals	Alarm light	Three-color alarm light	
		Number plate	
	Card reader	3 tracks MSR (single MSR)	
		MSR+RFID (multi-function card reader)	
	receipt collector	Waste receipt collector	
	Fingerprint reader	Fingerprint reader	
	handheld scanner	External handheld scanner;	
	Cash module	null	
	Shelving tray	Shelving tray(left side and right side)	
	Bracket	EFTPOS bracket	
		External handheld scanner bracket	
		External Printer Bracket	
	Scale	Range: 60KG Size	Range: 120KG Size
		450*600 (mm)	800*600 (mm)
Scale back plate			
		Plastic bag hanger	

MODEL		HS610U
Operating Voltage		100 ~ 264VAC;
Environment	Operating	10°C - 40°C/30%-75% RH non-condensing
	Storage	-5°C - 50°C/30%-80% RH non-condensing
EMC and Safety		FCC , CE, RoHS Pending
Colour		Black

- Optional Alarm light
- Optional scanner holder
- Optional Shelving tray
- Optional EFTPOS bracket



- Optional Handheld scanner
- Optional 60KG scale
- Optional 120kg scale

**Disclaimer:** All products specifications are subject to change without notice.