


Key Features

- ❑ 21.5"Horizontal full HD screen with bezel free fashion design ;
- ❑ Multi-Touch True flat capacitive touch panel for easier operation ;
- ❑ 75*75/100*100mm VESA mounting compatible ;
- ❑ Slim display for space saving
- ❑ Front panel IP54 protection design, oil proof, waterproof and corrosion resistant.



MODEL	HD220N
Processor	Intel Alder Lake-N CPU N97 , SOC up to 3.6Ghz
Operating System	Windows 11 IoT Enterprise LTSC
Memory	SO-DIMM DDR4 3200MHz 4GB ,up to 8GB
Storage	128GB M.2 SATA SSD
Network connection	LAN : 10M/100M/1000M Adaptive Internet Dual Band WIFI 2.4Ghz/5Ghz 802.11b/g/n/ac (optional)
Bluetooth	Bluetooth 4.0(optional)
Display Panel	21.5 "TFT-LCD(LED backlight) widescreen standard resolution: 1920 x 1080
Touch Panel	True Flat multi-point touch
Case/Bezel Color	Black
Display Ratio	16:09
Backlight Type	WLED
Active Display Area	476.64mm(H) × 268.11mm(V) ±0.3mm
Native Resolution	1920(RGB)×1080[FHD]
Colors	16.7M, 72% NTSC
Luminance	250nits
Contrast Ratio	1000:01
Viewing Angle(cr≥10)	Horizontal:178°(89°/89°); Vertical: 178°(89°/89°)
Backlight Lamp Life	30000 (Hours To 1/2 Brightness)
Touch Technology	Projected Capacitive Touch (P-Cap)
Touch Response Time	30ms
Surface Hardness	≥6H
Touch Screen Interface	USB
IO Ports	1*12V Power-in
	1*HDMI
	1*VGA
	4*USB: 2*USB 3.0 ; 2*USB2.0
	1*RJ45 1000MB Gigabit Ethernet
	1*Audio input for MIC
	1*3.5mm Audio Output
VESA Mount	75*75/100*100mm
Outline Dimensions	527.5mm(W)*319mm(H)*54.4mm(D)
Net Weight	4.8kg
Packaged weight	6kg
Power Supply	Output :12V 60W Input: 100~240V 50~60Hz
Speaker	3W*2
Operating Environment	0°C to 50°C; Humidity: 10% to 80% (Non-condensing)
Storage Environment	-20°C to 60°C; Humidity: 10% to 95% (Non-condensing)
EMC & Safety	CE/FCC pending

☐ VESA mounting compatible

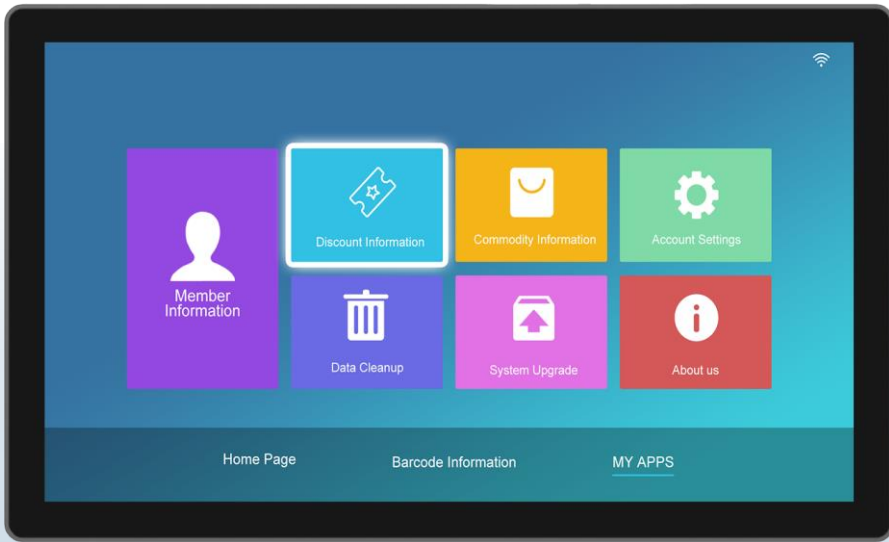

☐ Slim display for space saving



Disclaimer: All products specifications are subject to change without notice.

QINGDAO HISTONE INTELLIGENT COMMERCIAL SYSTEM CO.,LTD.
Wisdom Valley,NO.8 Shengshui Road, Laoshan District, Qingdao City, China.
Tel: +86 (532) 66069168

✉ infopos@histonetec.com www.hics.histonetec.com

HiStone